

SNIA

STORAGE NETWORKING INDUSTRY ASSOCIATION

EDUCATION

Fibre Channel Technologies “Current & Future”

Presenters:

Dr. M. K. Jibbe, LSI Logic (ESG)

Tom Hammod-Doel, LSI Logic (ESG)

Steven Wilson, Brocade Communications Systems, Inc.

2/28/2007

SNIA Legal Notice

- The material contained in this tutorial is copyrighted by the SNIA.
- Member companies and individuals may use this material in presentations and literature under the following conditions:
 - Any slide or slides used must be reproduced without modification
 - The SNIA must be acknowledged as source of any material used in the body of any document containing material from these presentations.
- This presentation is a project of the SNIA Education Committee.

The objectives of this tutorial are:

- Provide the user with a Primer on Fibre Channel
- Project the market outlook and roadmap of Fibre Channel
- Share what is New in Fibre Channel Standards for Protocols APIs, and Management.


What can FC provide today?

1. Flexible, Scalable relative to Topologies, Speed, Performance, Distance, Node connectivity and Low cost
2. Communication and Data Overhead (Framing, Data Communication, Latency, Efficiency, Routing Control, and Access Control),
3. Redundancy, Availability, and Failover,
4. Applicability in SAN (Easy of use), with large IT User Base

FC Topologies

Fabric

NL-Port can be attached to a Fabric

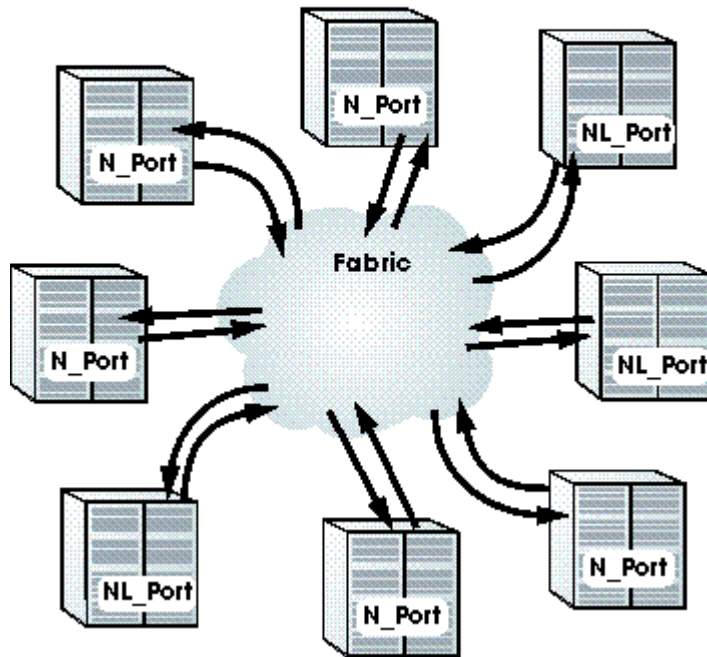

Switched Fabric

Up to 2/24 ports in a switched interconnect


Multiple concurrent communications for high aggregate throughput

- **Fibre channel supports a 24-bit address space**
 - ✓ Provides 2^{24} addresses
 - ✓ FC routing is done based on NPort ID assigned on login (24-bit addressing consisting of Domain ID, Area ID, and Device ID)
- **FC Device ports are uniquely identified by a MAC ID (Worldwide Name)**
- **Address lookup is provided by the Fabric Switch using the Name Server portion of Directory Services**




FC Topologies

Loop

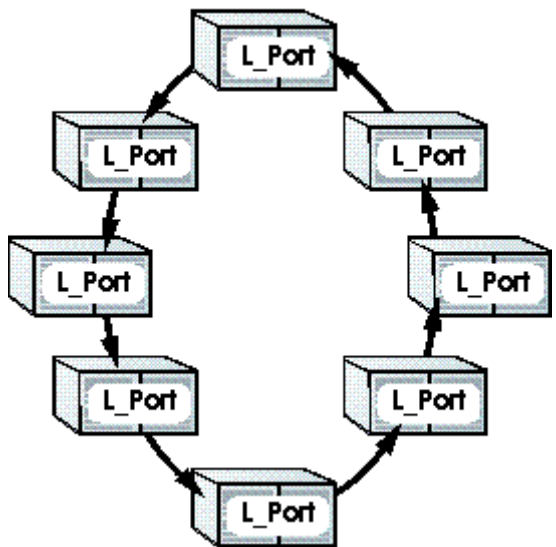

Arbitrated Loop → Up to 127 ports on a shared loop

Point to Point



Point-to-Point → Two ports on a dedicated link



Topology Comparison


Attribute	Point to Point	Arbitrated Loop	Switched Fabric
Number of ports	2	2 to 127	Up to 2
Maximum bandwidth	Link rate times 2	Link rate times 2	Link rate times number of ports
Bandwidth allocation	Dedicated	Shared by all loop ports	Managed by fabric
Address assignment	N_Port Login	Loop initialization and Fabric Login	Fabric Login
Number of concurrent circuits	1	1	Number of port pairs (number of ports/2)
Effect of port failure	Point-to-point link fails	Loop fails (port bypass function required)	Link between switch and port fails
Concurrent maintenance	Link is down	May be disruptive to entire loop	Link between switch and port is down
Expansion	Add additional point-to-point links	Attach loop to fabric	Expand fabric
Redundancy/High Availability	Add redundant port and point-to-point links	Use dual loops and dual-ported devices	Use redundant switches
Link rates supported	All	All (all devices on loop must be same rate)	All (fabric may support mixed rates)
Media types supported	All	All	All
Glasses of service supported	All	Class-1, -2 -3	All
Frame delivery order	In order	In order	Note 1
Access to interconnect medium	Dedicated	Arbitration	Dedicated
Cost per port	Port cost	Port cost + loop function (+hub if used)	Port cost + fabric port

Note 1: Frame Delivery Ordering is switch implementation dependent

Flexibility and Scalability

- Uses a common transport mechanism to support:
 - Physical interface types: Multi/Single Mode Fiber, and Cu
 - Traditional Channels: SCSI, IPI3, SBCCS, and HIPPI
 - Traditional Networks: IP, IEEE 802, and ATM
- High-speed -100/200/400/800/1200 MB/s, Reliable data transmission:
 - 100/200/400/800/1200 MB/s
 - BER < 10⁻¹²
- Provide scalability of performance and cost
- Encourage industry support through open standards
- Designed to fulfill the needs of SANs

Speed

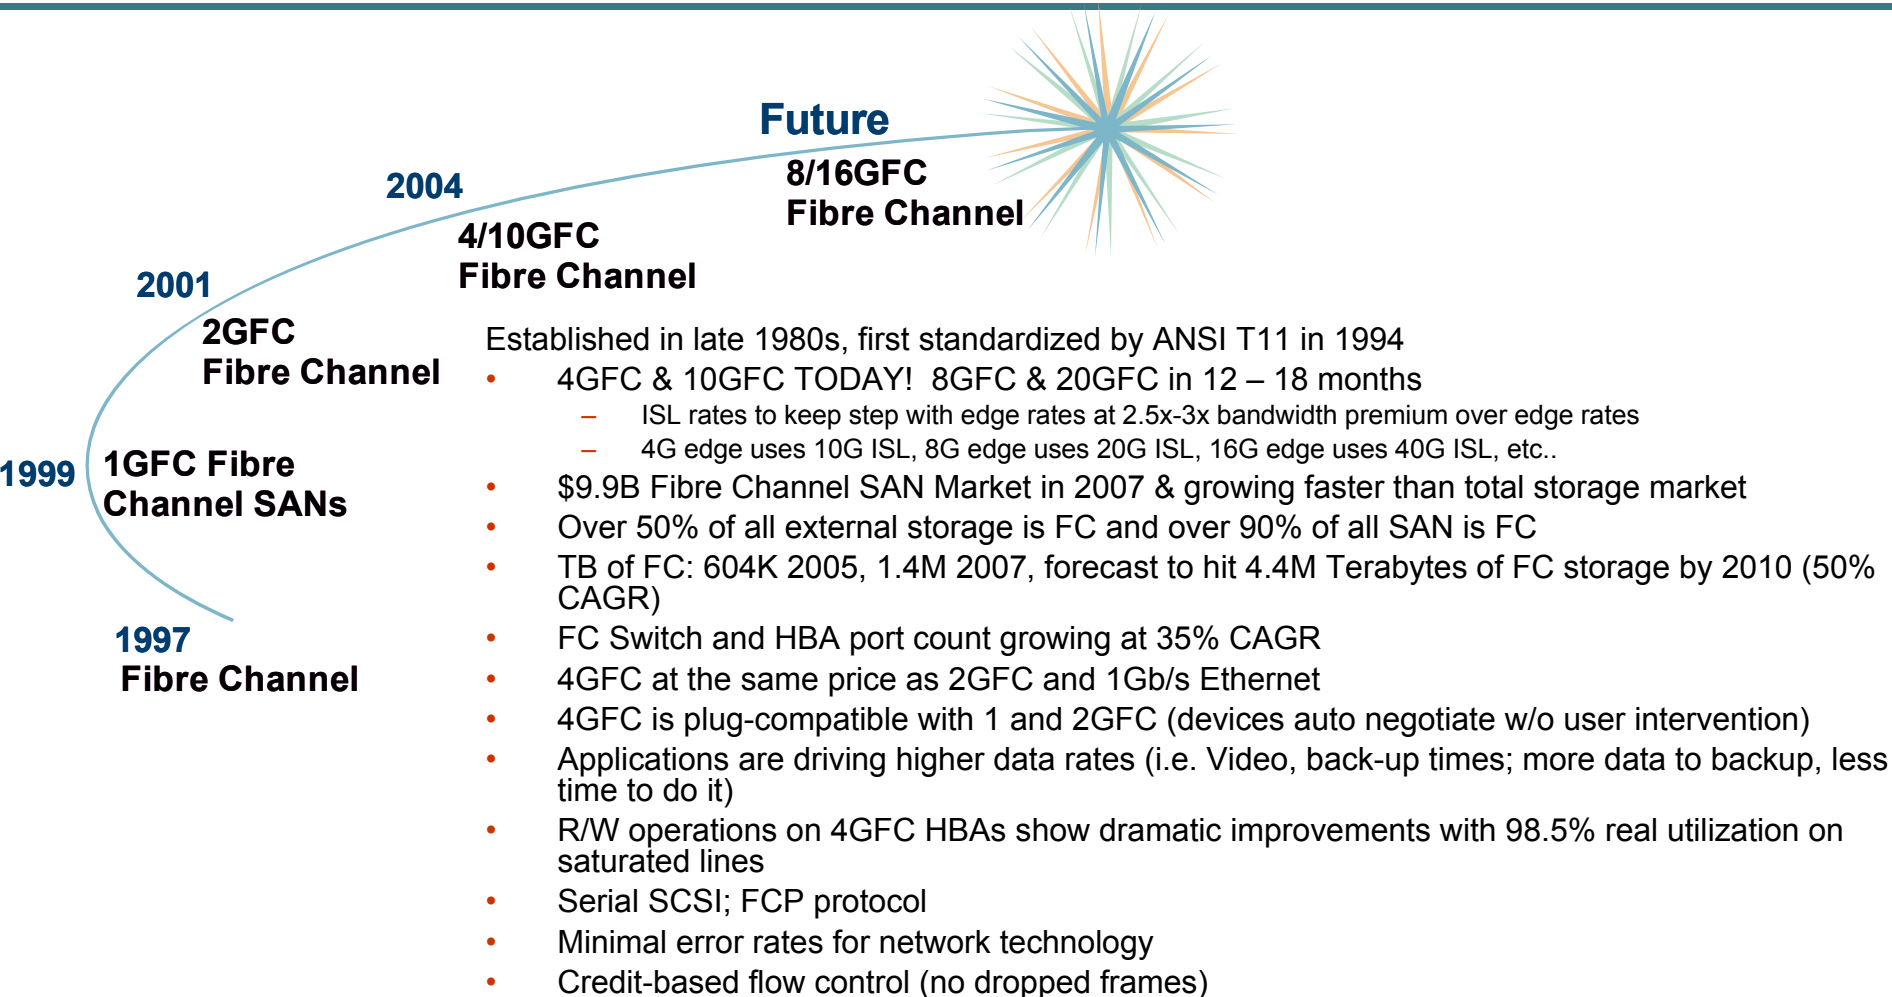




Maximum Distance

Media Type	Transmitter	Speed	Distance	Variant
Electrical (Differential)	ECL/PECL	400 MB/s	0m – 10m (typical)	400-DF-EL-S
		200 MB/s	0m – 10m (typical)	200-DF-EL-S
		100 MB/s	0m – 30m (typical)	100-DF-EL-S
9 um. Single-Mode Fiber	1550 nm. Long wave Laser	400 MB/s	2m - >50km	400-SM-LL-V
		200 MB/s	2m - >50km	200-SM-LL-V
		100 MB/s	2m - >50km	100-SM-LL-V
	1300 nm. Long wave Laser	400 MB/s	2m - 2km	400-SM-LL-I
		200 MB/s	2m - 2km	200-SM-LL-I
		100 MB/s	2m - 10km 2m - 2km	100-SM-LL-L 100-SM-LL-VI
50 um. Multi-Mode Fiber	850 nm. Short-wave Laser	400 MB/s	0.5m - 175m	400-M5-SN-I
62.5 um. Multi-Mode Fiber		200 MB/s	0.5m - 300m	200-M5-SN-I
		100 MB/s	0.5m - 500m	100-M5-SN-I
		400 MB/s	0.5m - 70m	400-M6-SN-I
		200 MB/s	0.5m - 150m	200-M6-SN-I
		100 MB/s	0.5m - 300m	100-M6-SN-I

- **2 Km distance with Multi- mode Fibre**
- **10 Km distance with Single Mode Fibre**
- **5000 Km distance with FC over IP**

Frames

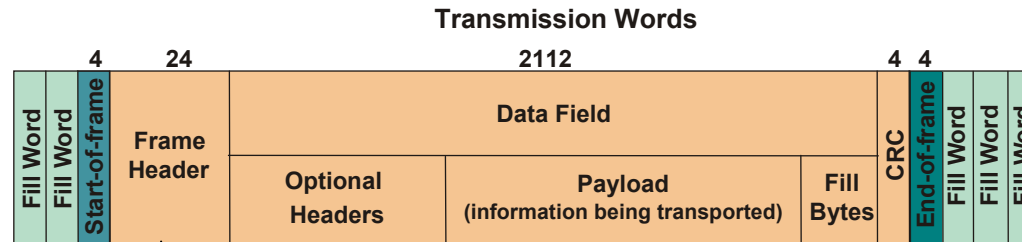

Frame type and content/function
Class-specific control information
Protocol Type in this frame
Sequence this frame belongs to
Originator Exchange ID
Multi-purpose parameter field

R_CTL	Destination Address (D_ID)	
CS_CTL	Source Address (S_ID)	
TYPE	Frame Control (F_CTL)	
SEQ_ID	DF_CTL	SEQ_CNT
OX_ID		RX_ID
Parameter Field (PARM)		


Where frame is being sent to
Where the frame came from
Frame Control field
Sequential count of frames
Responder Exchange ID

Expiration
Security Header
Network Header
Association Header
Device Header


- Flexibility
 - Fly by Frame handling
 - Out of order
- Speed
- Routing



Data Traffic with Exchanges

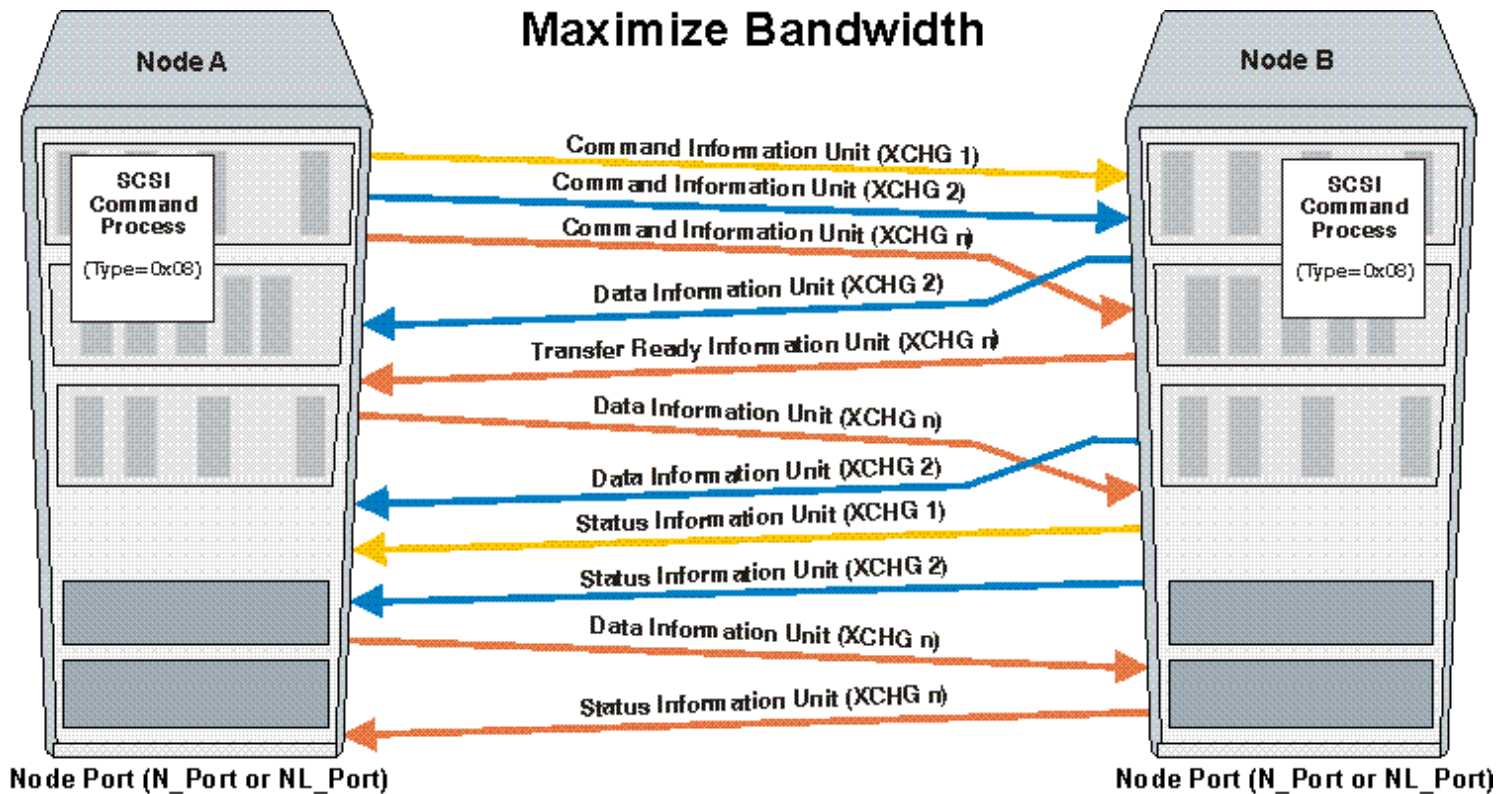

Establishing Operating Environment

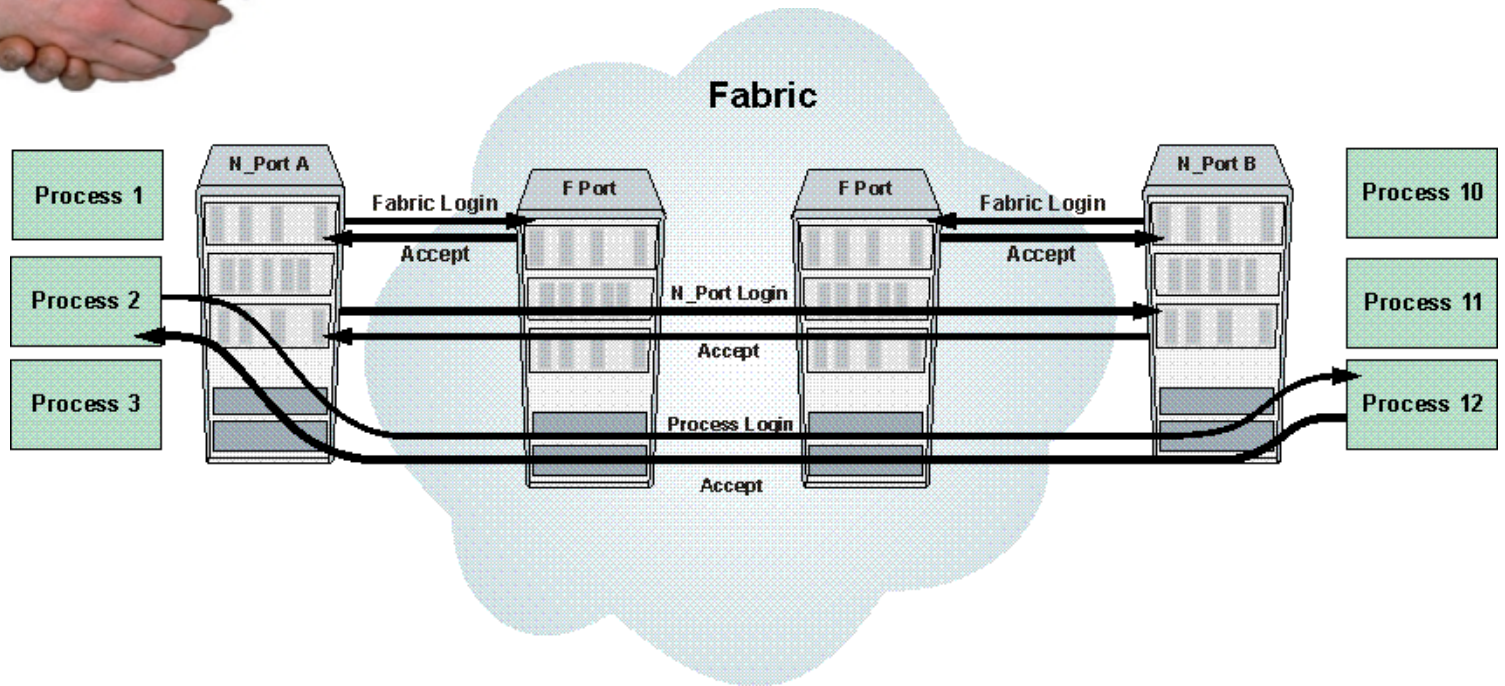

Flow Control: Access Control, Latency, and Efficiency

Login Buffer to Buffer

- Node to Fabric
- Fabric to Node


Login Node to Node

Flow control is credit based


- Buffer-To-Buffer Credit
- Control pace of frame transmission
- Each R_RDY received increments the available BB_Credit value

Latency

- Across a single switch, average latencies are less than 400 nanoseconds.

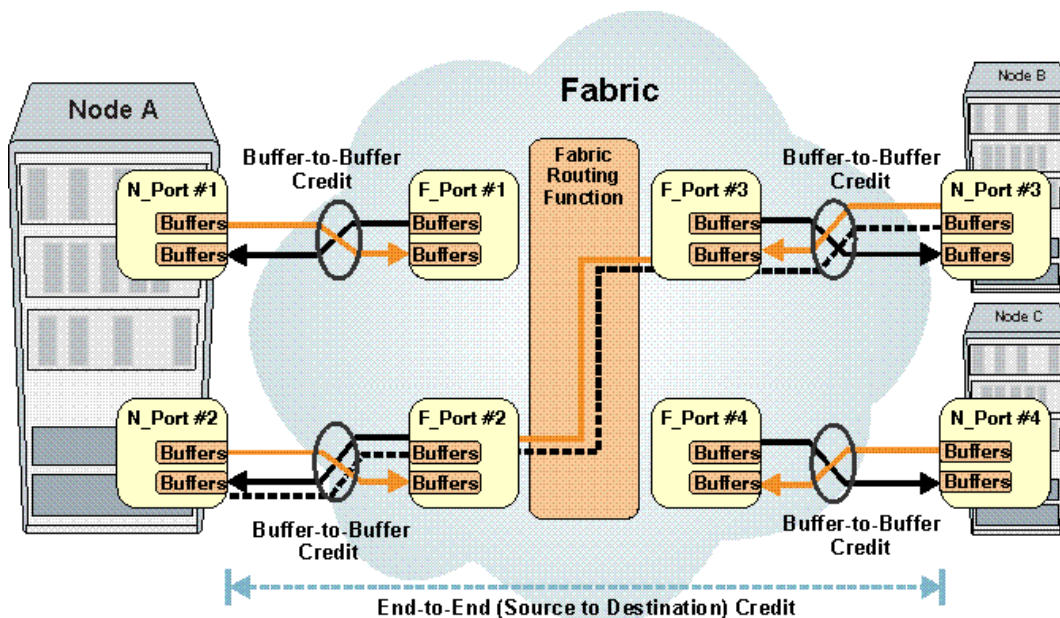


FC Routing

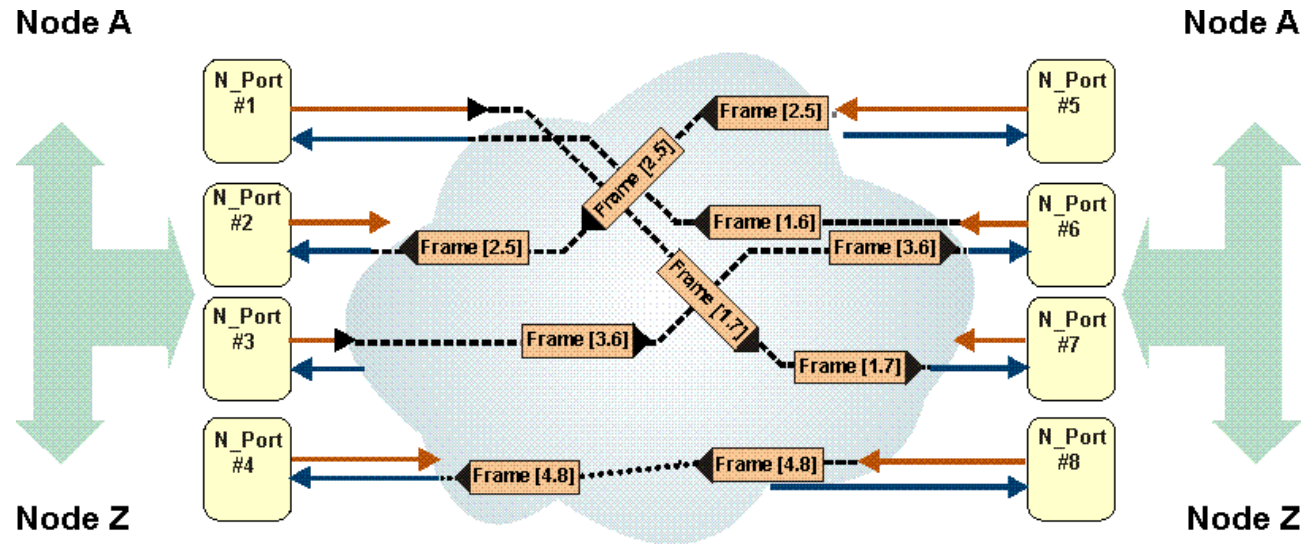

- Connect Any to Any
- Maximize Connectivity
- Simplex and Duplex

FC Access Control

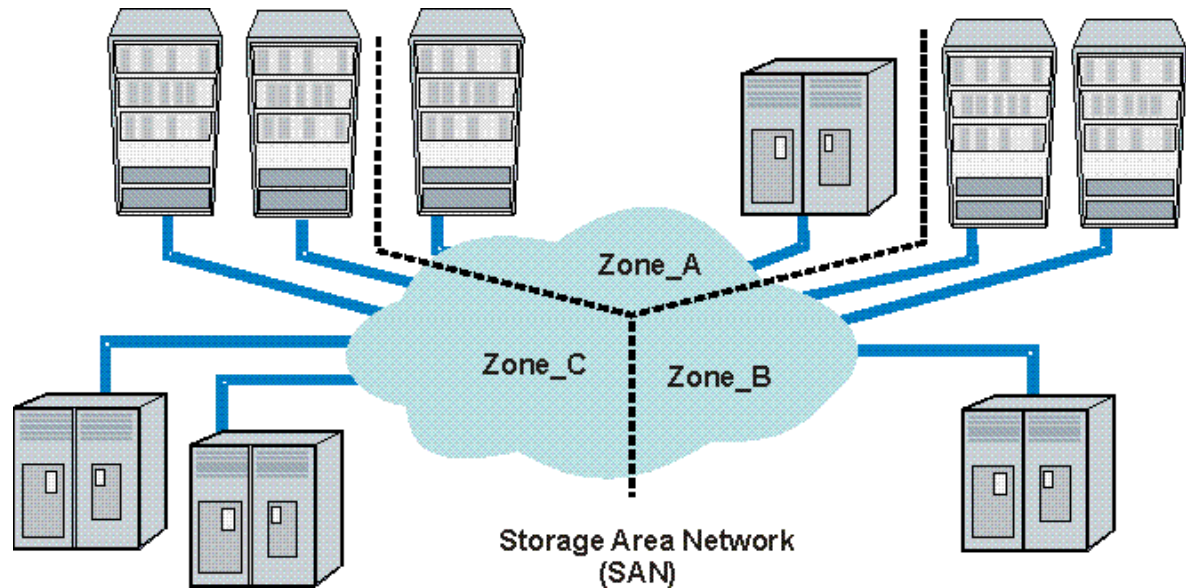

Divide



and *conquer*




Provide Accessibility

Soft Zoning: Employs the Name Server to limit the information returned to an initiator in response to a query.


Hard Zoning: Enforced by the Fabric

Redundancy, Availability, and Failover

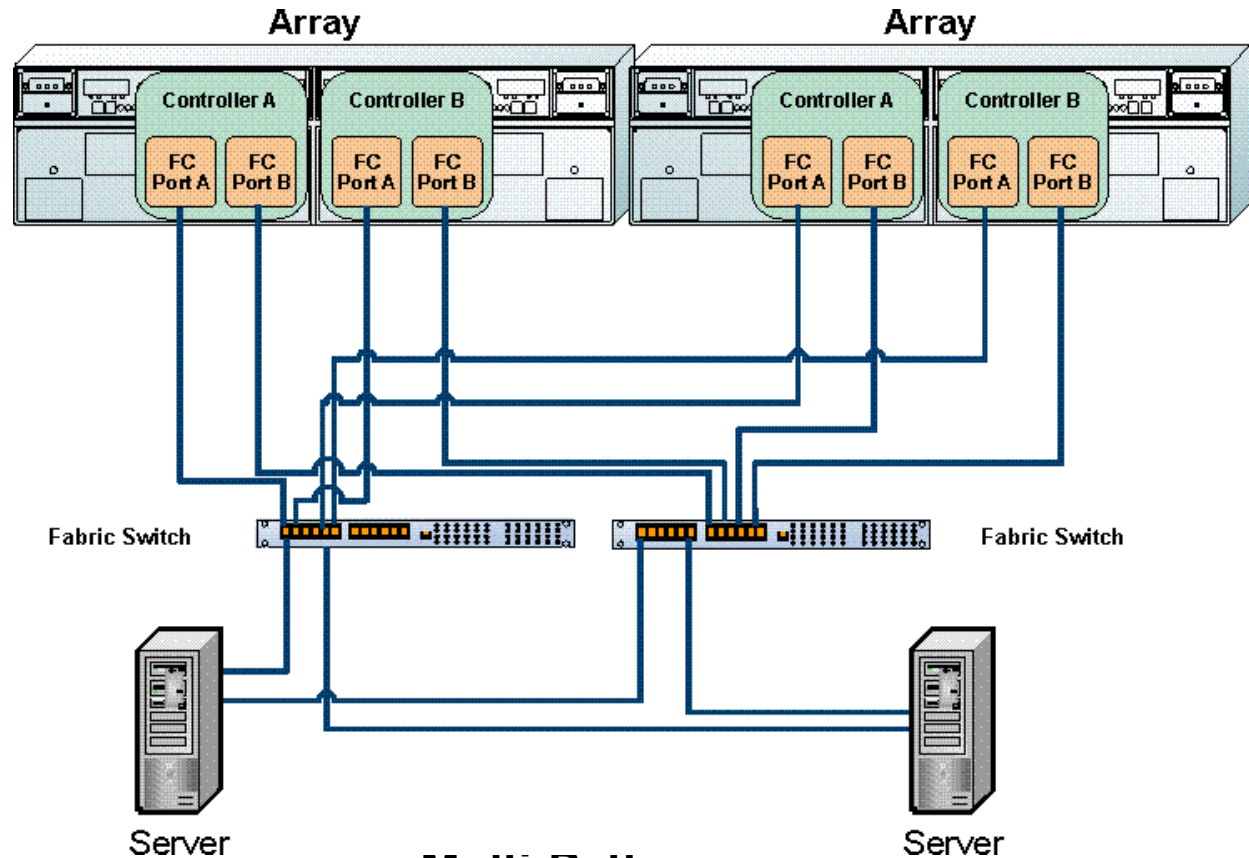


- Multi-Path
- Full Redundancy
- Path Failover

FC Products Dominant in Enterprise Datacenter

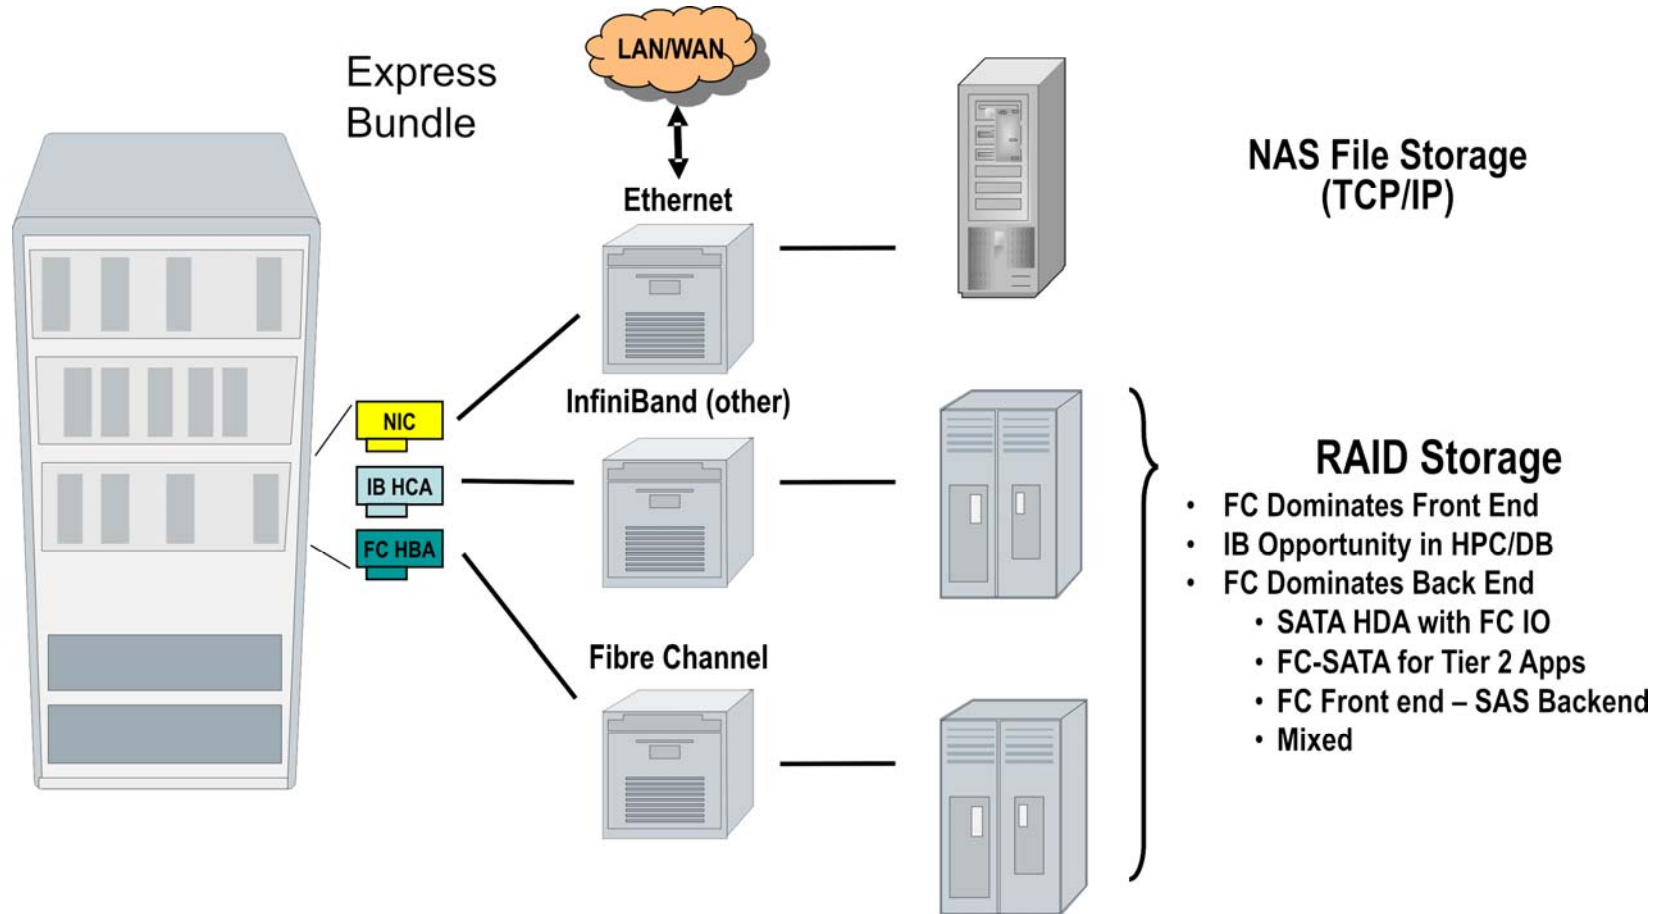

Detailed RAID Storage: Array Module with Different Drive Technologies

There's a lot more under the Fibre Channel hood than appearances reveal:

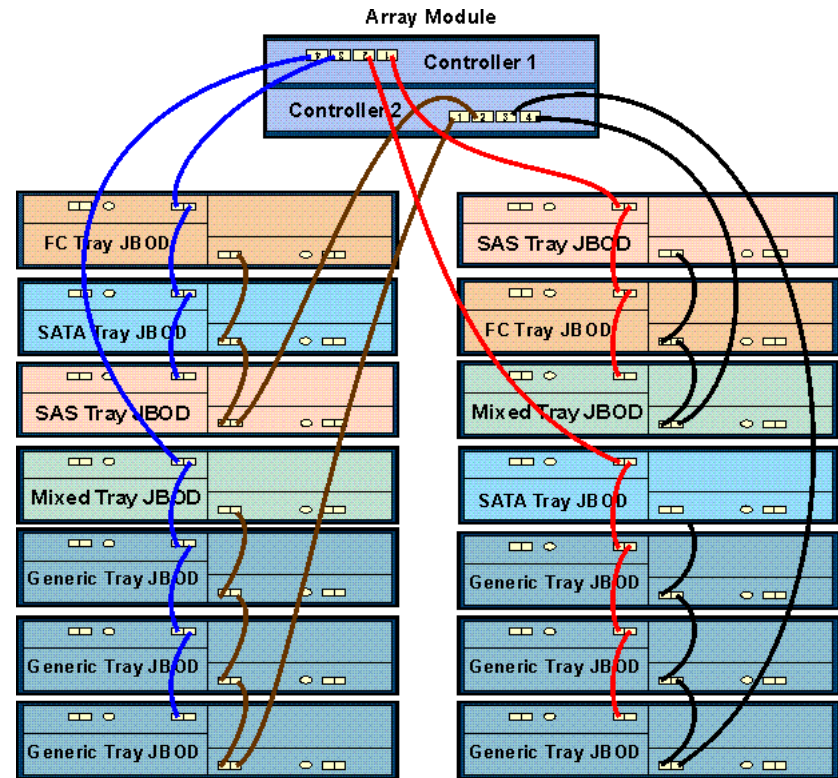

Array Module with Different Drive Tray Types

FC Product Performance – IOPS: Host Interface – Drive Interface

	Drive Type	Dual 4 GFC	Quad 4 GFC	Future 8 GFC
Burst I/O rate cache reads (512 byte)		125K	125K	200K
Sustained I/O rate disk reads (4k – R5)	FC	40k	40k	80K
	SAS			70K
	SATA			12K
Sustained I/O rate disk writes (4k- R5) - CMD	FC	9k	9k	15K
	SAS	8K	10K	12K
	SATA	2K	2K	4K
Number of drives required for benchmark test and code thread	FC, SAS, / SATA	96D / 8T	96D / 8T	96D / 8T


- FC continues to evolve with different technologies

FC Product Performance – MB/sec

	Drive Type	Dual FC	Quad FC	Future 8 GFC
Sustained throughput cache read (512k)		1600 MB/s	1800 MB/s	3000 MB/s
Sustained throughput disk read (512k)	FC	850 MB/s	850 MB/s	1600MB/s
	SAS	800 MB/s	800 MB/s	1200 MB/s
	SATA	800 MB/s	800 MB/s	900 MB/s
Sustained throughput disk write (512k)	FC	800 MB/s	800 MB/s	1600 MB/s
Cache mirroring disabled	SAS	750 MB/s	750 MB/s	750 MB/s
Cache mirroring disabled	SATA	750 MB/s	750 MB/s	750 MB/s
Number of drives required for benchmark test and code thread	FC	48D / 8T	48D / 8T	48D / 8T

- FC continues to evolve with different technologies

Current Cost Comparison Table

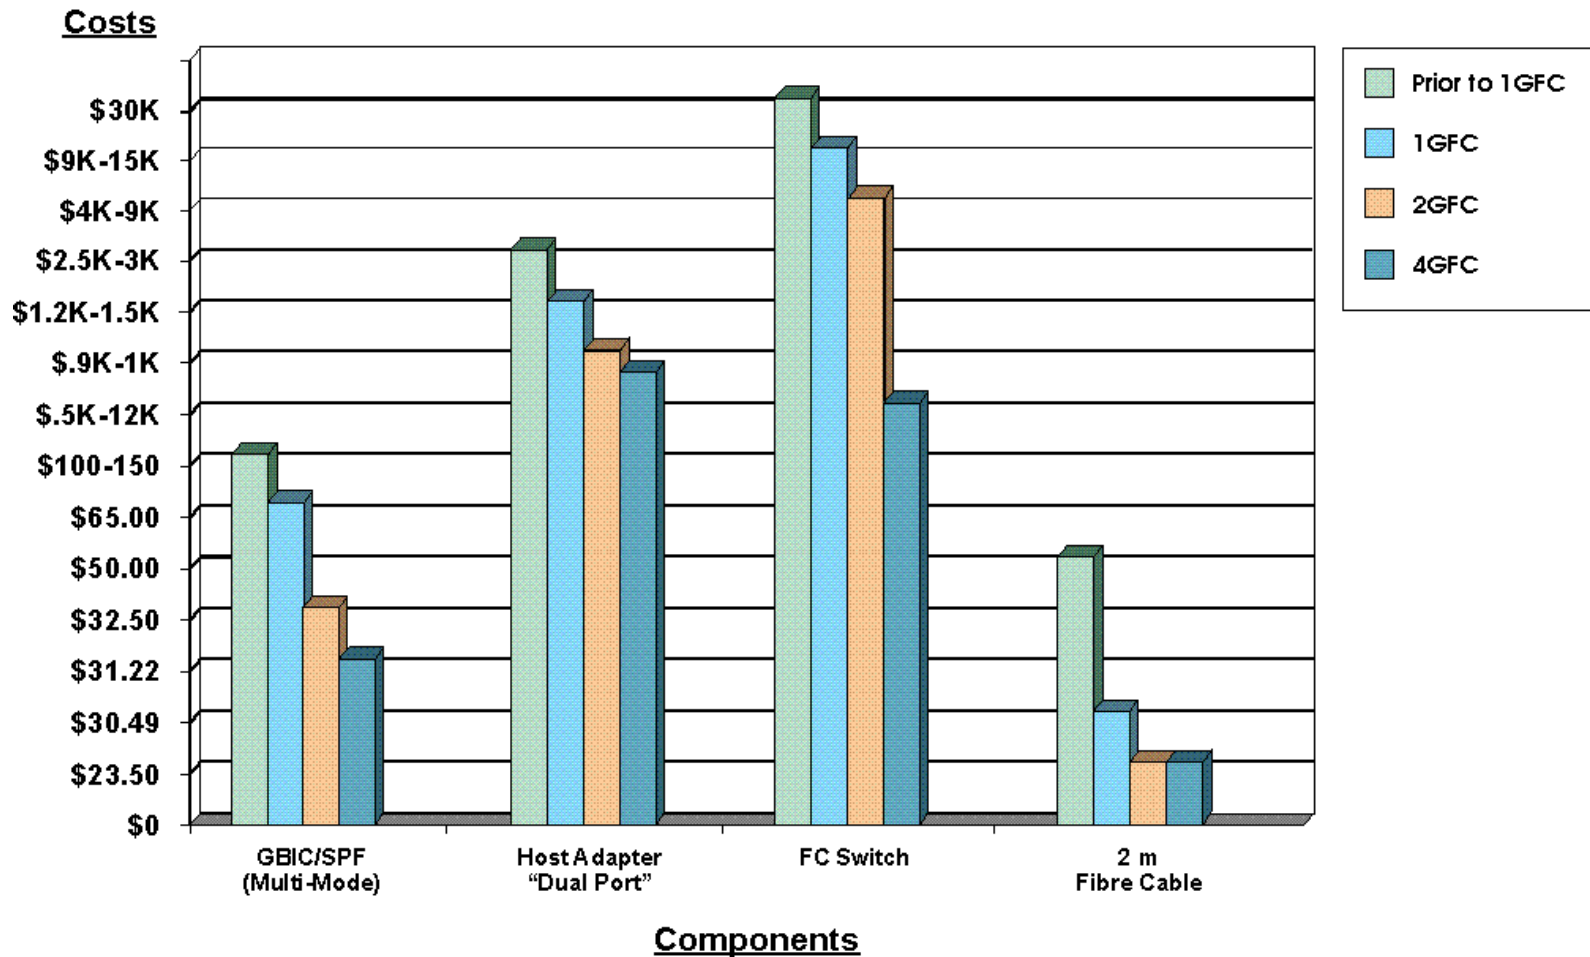




SNIA
STORAGE NETWORKING INDUSTRY ASSOCIATION

EDUCATION

Fibre Channel is Here to Stay.

What's New?

A Roadmap to the Future!




**The report of my death
was an exaggeration.**



Continuous SAN Market Growth

Block External Controller-Based Storage by Host Interface Revenue

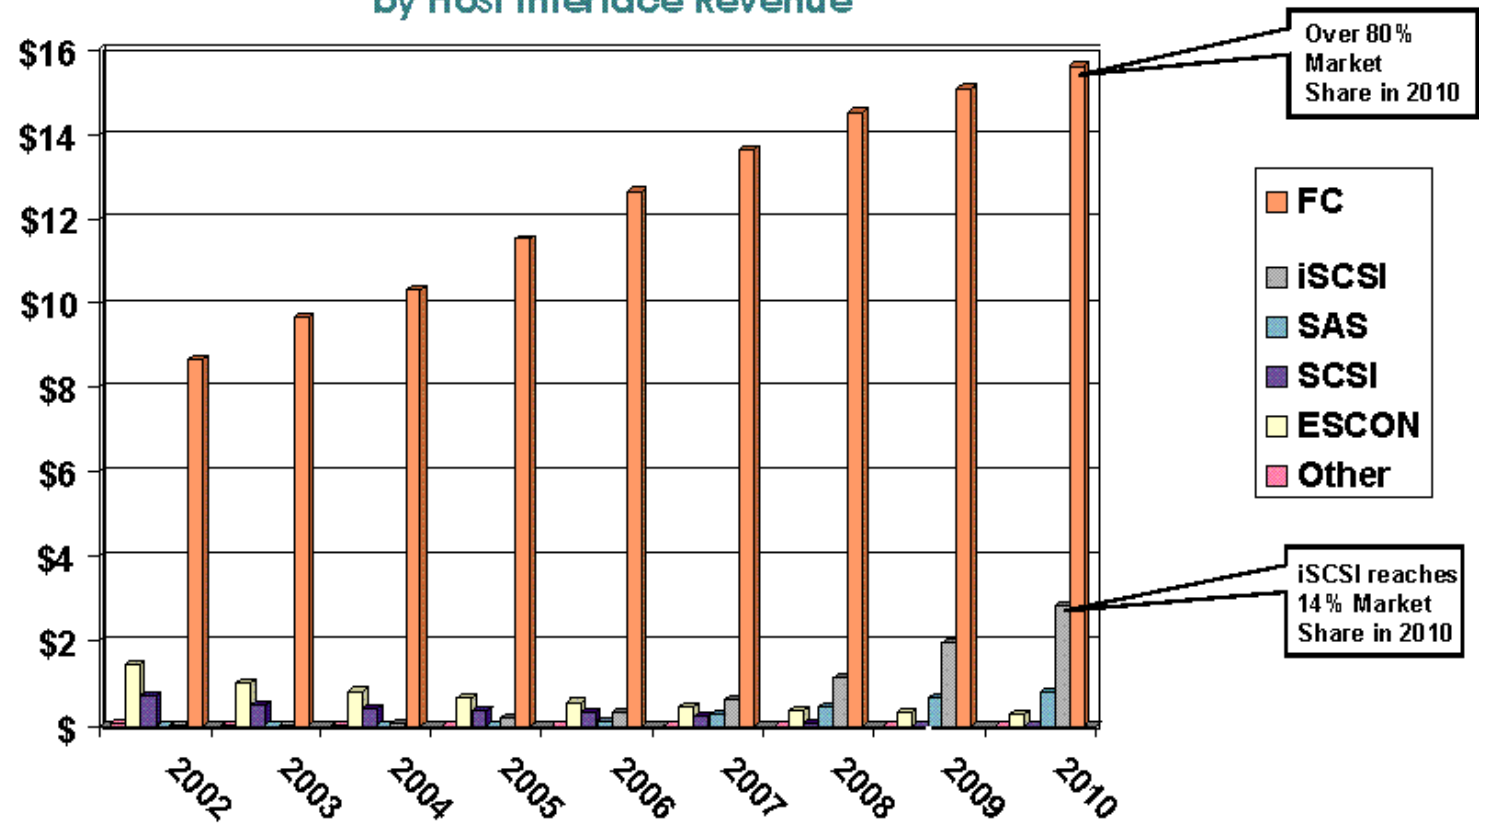

Source: Gartner External Controller-Based Disk Storage WW 2006-2010, 6 October 2006 (FICON included in Fibre Channel)

Fibre Channel's Continuous Evolution

FC has been the major storage system interconnect since the mid 90s


- FC dominates the SAN and external storage market place

How will FC continue to Meet customers' evolving needs?

- Faster speeds
- Bandwidth/Cost leadership
- Investment protection
- Additional capabilities
- Lower cost solutions
- Simplified solutions (Plug-n-play)

Continuous Back-End Market Growth

Block External Controller-Based Disk Storage by HDD Interface Revenue

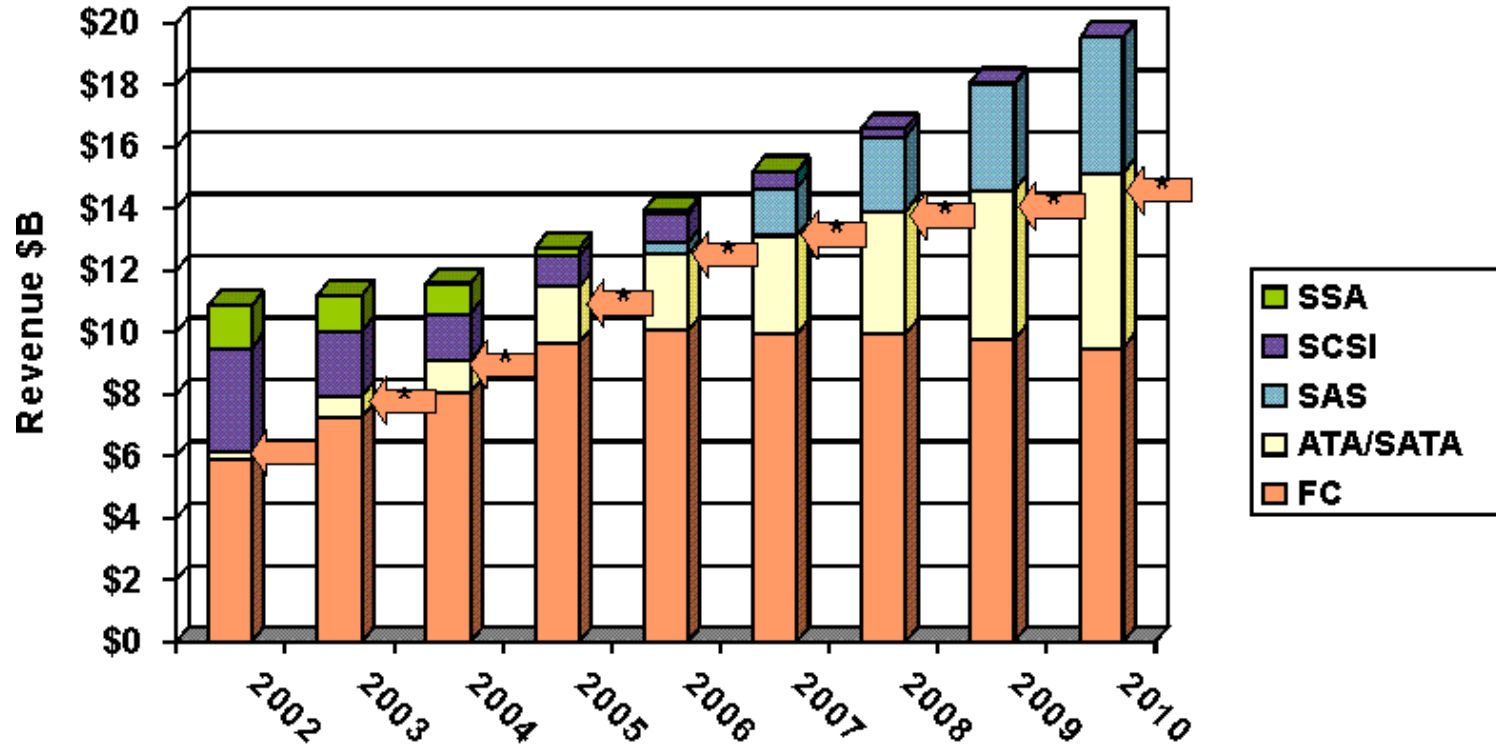

Source: Gartner External Controller-Based Disk Storage WW 2006-2010, 6 October 2006 (FICON Included in Fibre Channel)

← * Estimate of FC+SATA over FC Infrastructure. Source: FCIA

FCIA Fibre Channel Speeds – 3 Connection Types

FC specifies 3 connection types

- FC-Base2
- FC-Base10
- FC-BaseT
- *All speeds of each type Auto-negotiate best speed w/o any user intervention!*
- *Each speed within its connection type is backward compatible 2 generations!*

FC-Base2


- **Predominant FC interconnect**
- **Used for fabric Edge and ISL**
- **Also used for Disk and Tape Drives**
- **All speeds single lane serial streams**
- Optics and copper cabling, SFP/SSF

FC-Base10

- Used for ISL (2.5x-3x bandwidth of edge)
- *4G Edge/10G ISL migrates to 8G Edge/20G ISL migrates to 16G Edge/40G ISL, etc*

FC-BaseT

- FC using Cat5e/6/6a infrastructures
- Copper only (Cat5e/6/6a cables)
- RJ-45 connector
- User can use FC without changing any existing or new Ethernet cabling!

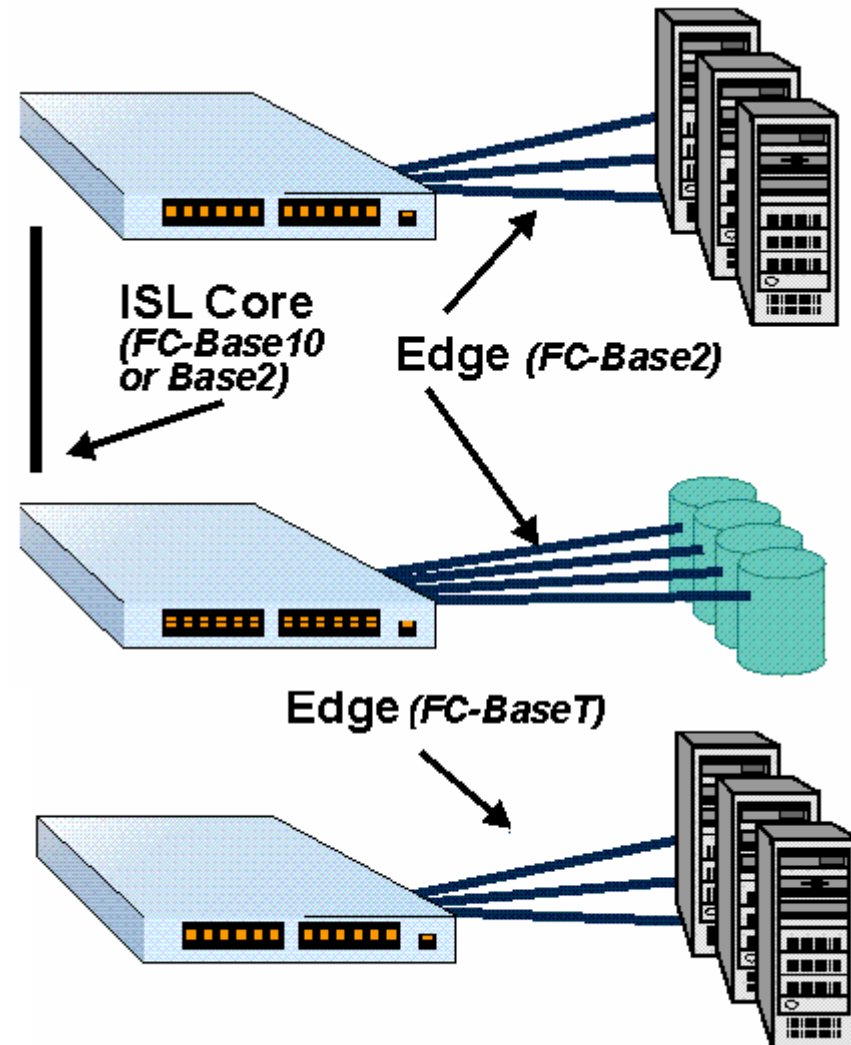

FCIA Fibre Channel Speed Roadmap

Base2*

Product Naming	Throughput (MBps)	Line Rate (GBaud)†	T11 Spec Technically Completed (Year)‡	Market Availability (Year)‡
1GFC	200	1.0625	1996	1997
2GFC	400	2.125	2000	2001
4GFC	800	4.25	2003	2005
8GFC	1600	8.5	2006	2008
16GFC	3200	17	2009	2011
32GFC	6400	34	2012	Market Demand
64GFC	12800	68	2016	Market Demand
128GFC	25600	136	2020	Market Demand

Base10**

10GFC	2400	10.52	2003	2004
20GFC	4800	21.04	2007	2008
40GFC	9600	42.08	TBD	Market Demand
80GFC	19200	84.16	TBD	Market Demand
160GFC	38400	168.32	TBD	Market Demand

BaseT***

1GFC	200	1.0625	2006	2007
2GFC	400	2.125	2006	2007
4GFC	800	4.25	2006	2007
8GFC	1600	8.5	TBD	Market Demand
10GFC	2400	10.52	TBD	Market Demand

***Base2** used throughout all applications for Fibre Channel infrastructure and devices. Each speed maintains backward compatibility at least two previous generations (i.e., 4GFC backward compatible to 2GFC and 1GFC)

****Base10** commonly used for ISLs, core connections, and other high speed applications demanding maximum bandwidth.

*****BaseT** used in common Ethernet copper infrastructures incorporating CAT5e/6/6a cables and RJ-45 connectors

†**Line Rate**: All Base2 speeds are single-lane serial stream ‡**Dates**: Future dates estimated

FCIA “Condensed” Roadmap (Speed Gb/s)

- **FC-Base2 (Edge, Backend, and ISL)**
 - 1GFC, 2GFC, 4GFC shipping today
 - 8GFC Ships in 12-18 months
 - 16GFC, 32GFC, 64GFC, 128GFC
- **FC-Base10 (ISL)**
 - 10GFC shipping today
 - 20GFC ships in 12-18 months
 - 40GFC, 80GFC, 160GFC
 - 100GFC under study (leverage IEEE 802.3 work)
- **FC-BaseT (Edge)**
 - new 2006 standard for Ethernet RJ45 Cat5/6 copper)
 - 1GFC, 2GFC, 4GFCF, ships in 12-18 months
 - 8GFC, 10GFC
 - 8GFC follows typical FC trend
 - 10G follows typical Ethernet trend

Fibre Channel Is Being Improved According To Real Customer Requirements



- **New Fibre Channel Standards for**
 - **Management And Ease Of Use**
 - **Operational Flexibility and Scalability**
 - **Security**



Management Improvements

- **Fabric Device Management Interface**
 - HBA Information Can Be Retrieved From The Fabric
- **Fibre Channel Open Management**
 - SMI-S
 - SNMP MIB Development
- **Improvements to the Fabric Configuration Server**
 - Advanced Topology Discovery and Bulk Data Retrieval
- **Common Transport**
 - Session Semantics Have Been Added
- **Diagnostic Tools**
 - FC Trace Route and Ping


- **FAIS: Fabric Application Interface Specification**
 - Allows fabric to host certain applications
- **Event Server**
 - More Granular Event Registration
- **Virtual Channels**
 - Enables Traffic Differentiation On Links
- **Enhanced Commit Service**
 - Fabric Locking More Granular

- **Frame Tagging**
 - Enables Virtual Fabrics
- **Routing Architectures and Models**
 - Allows Devices On Distinct Fabrics To Communicate Without a Merge
- **FC-SATA: SATA Tunneling over FC**
 - Brings native tiered storage to FC
 - FC SATA: An FC-4 mapping of the Serial ATA storage interface protocol to Fibre Channel

Operational Flexibility


- What Is NPIV?
 - Acronym for N-port ID virtualization.
 - Additional attribute of an F-port.
 - FLOGI request allocated the base PID 0xddaa00.
 - FDISC(SID=0) requests allocate virtual PIDs: 0xddaa01, 0xddaa02, 0xddaa03 ...
 - Used by multiple virtual machines emulated on a physical machine.

NPIV Overview

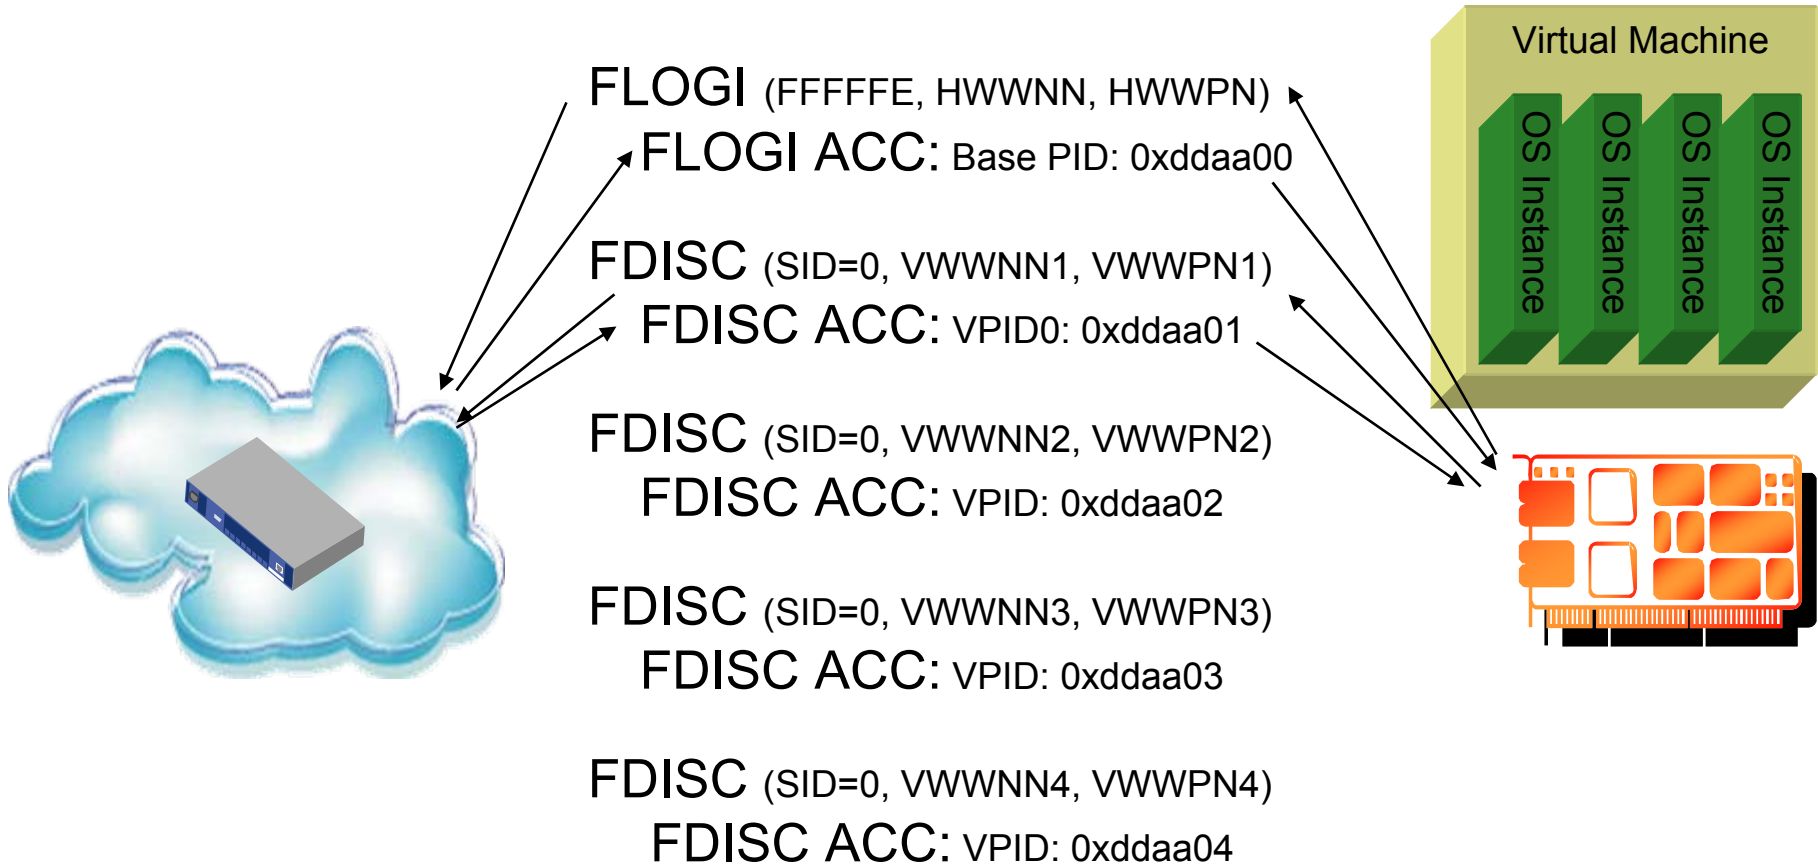

Storage Virtualization

- Three types of storage virtualization

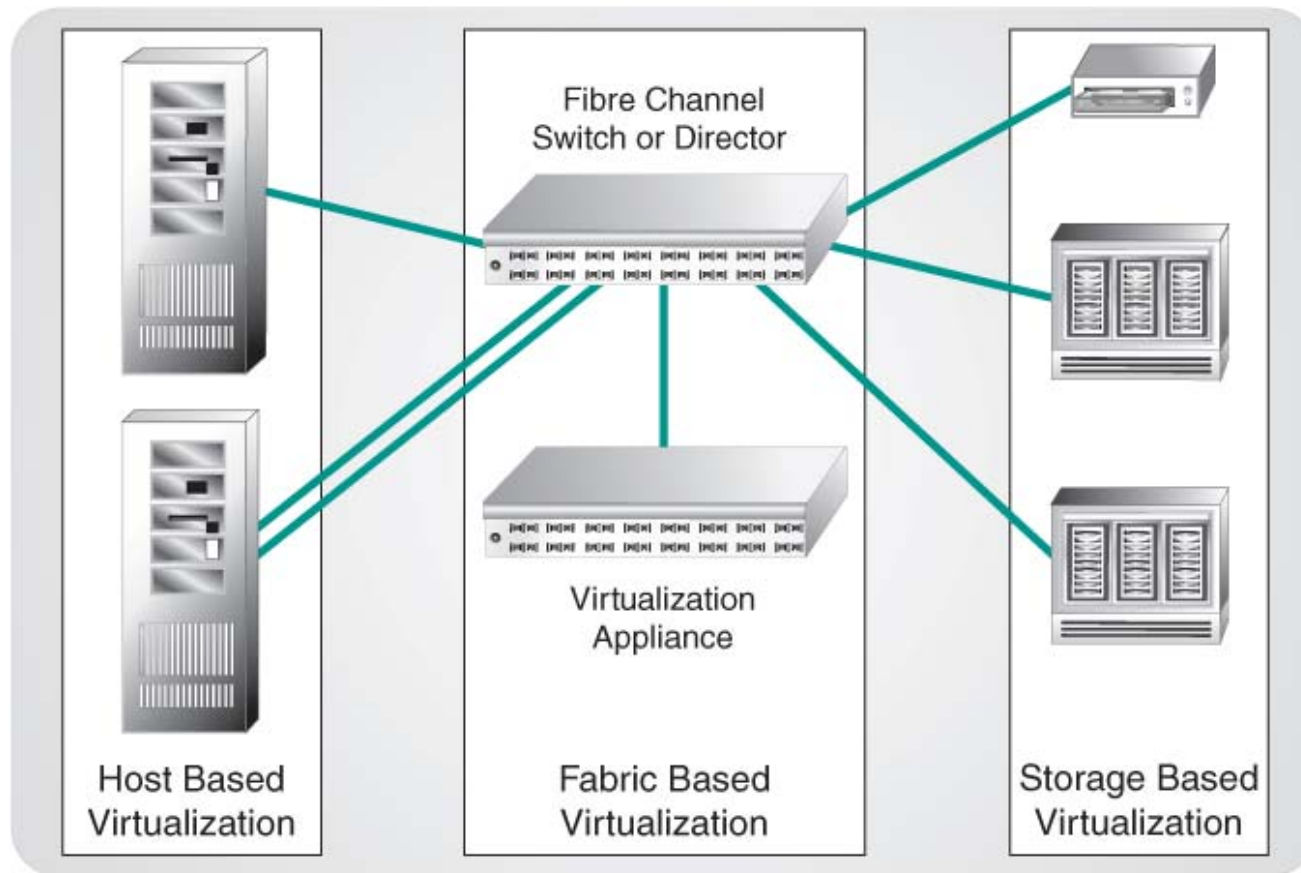


Refer to SNIA Virtualization Tutorials



Fabric Based Virtualization


- FC-Fabric Application Interface Specification (FAIS)

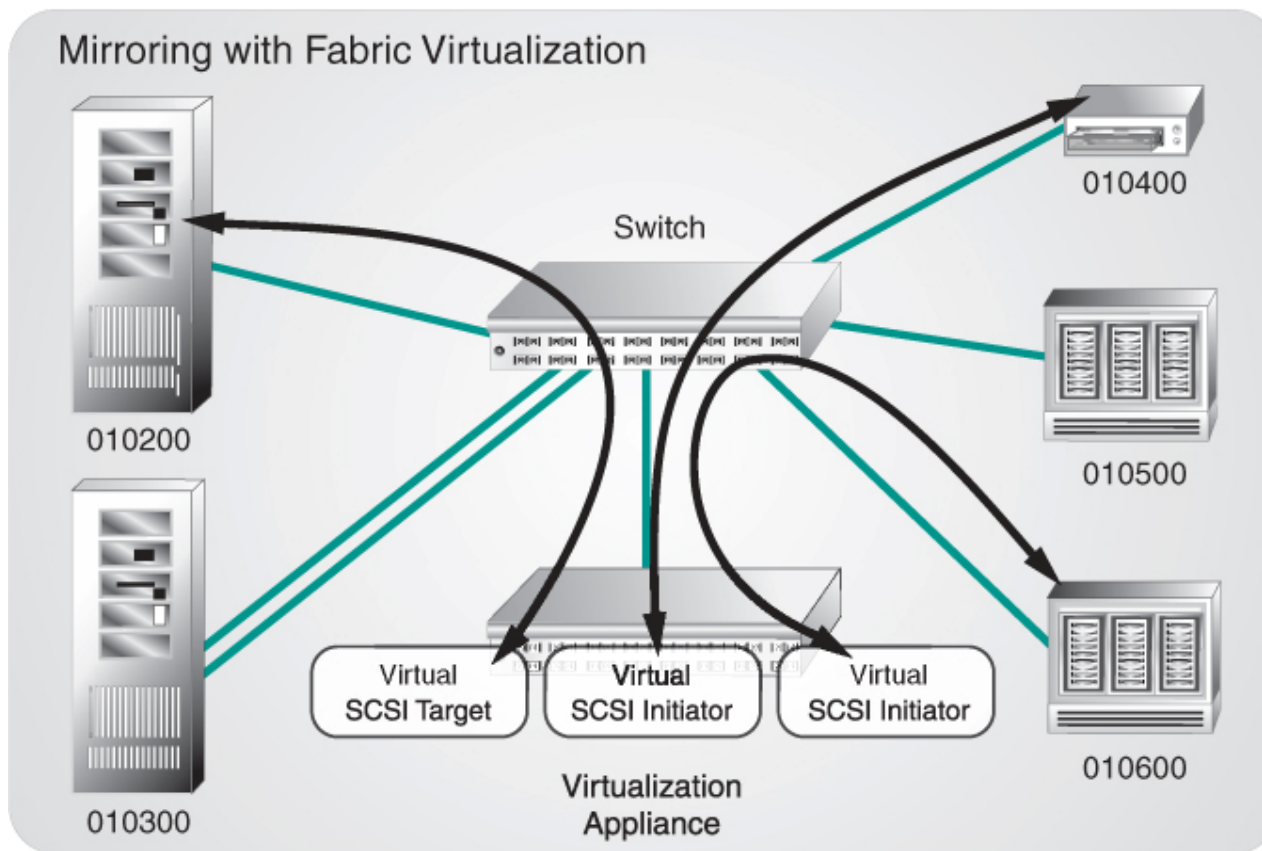




Virtual Channels

- ISL buffer credits are assigned to traffic flows to provide Quality of Service (QoS) between switches

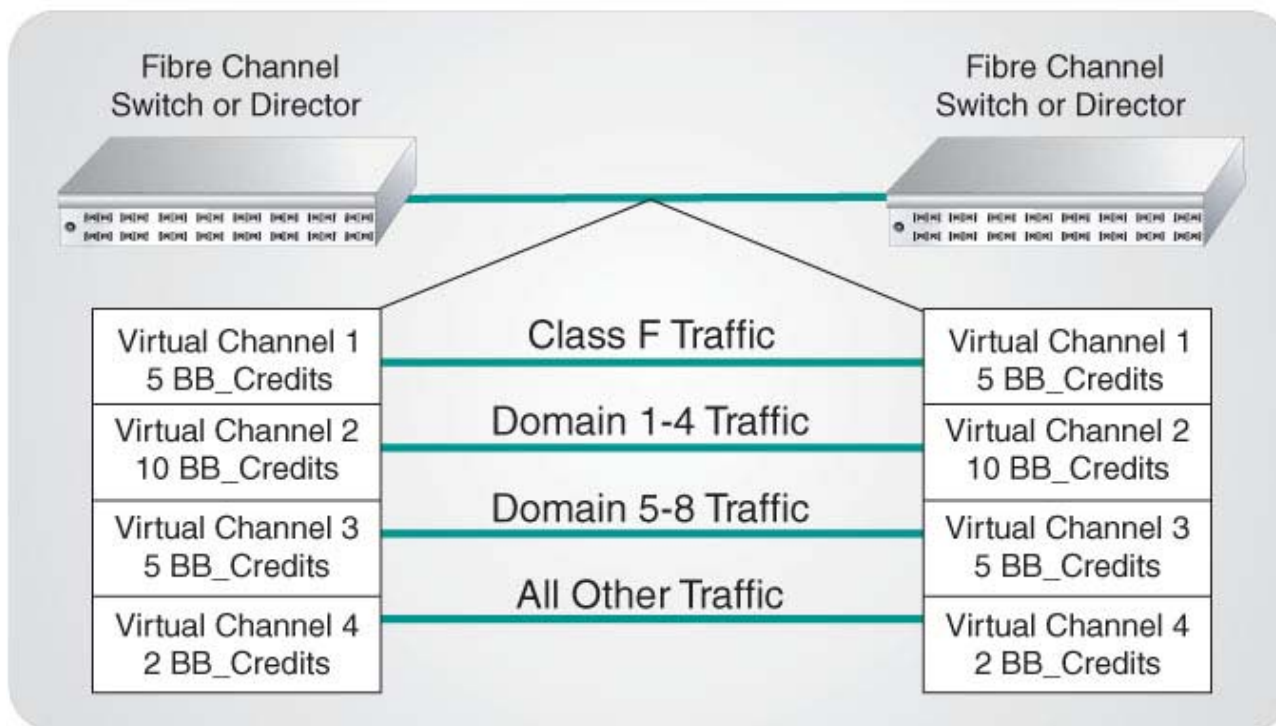




Virtual Fabric Tagging

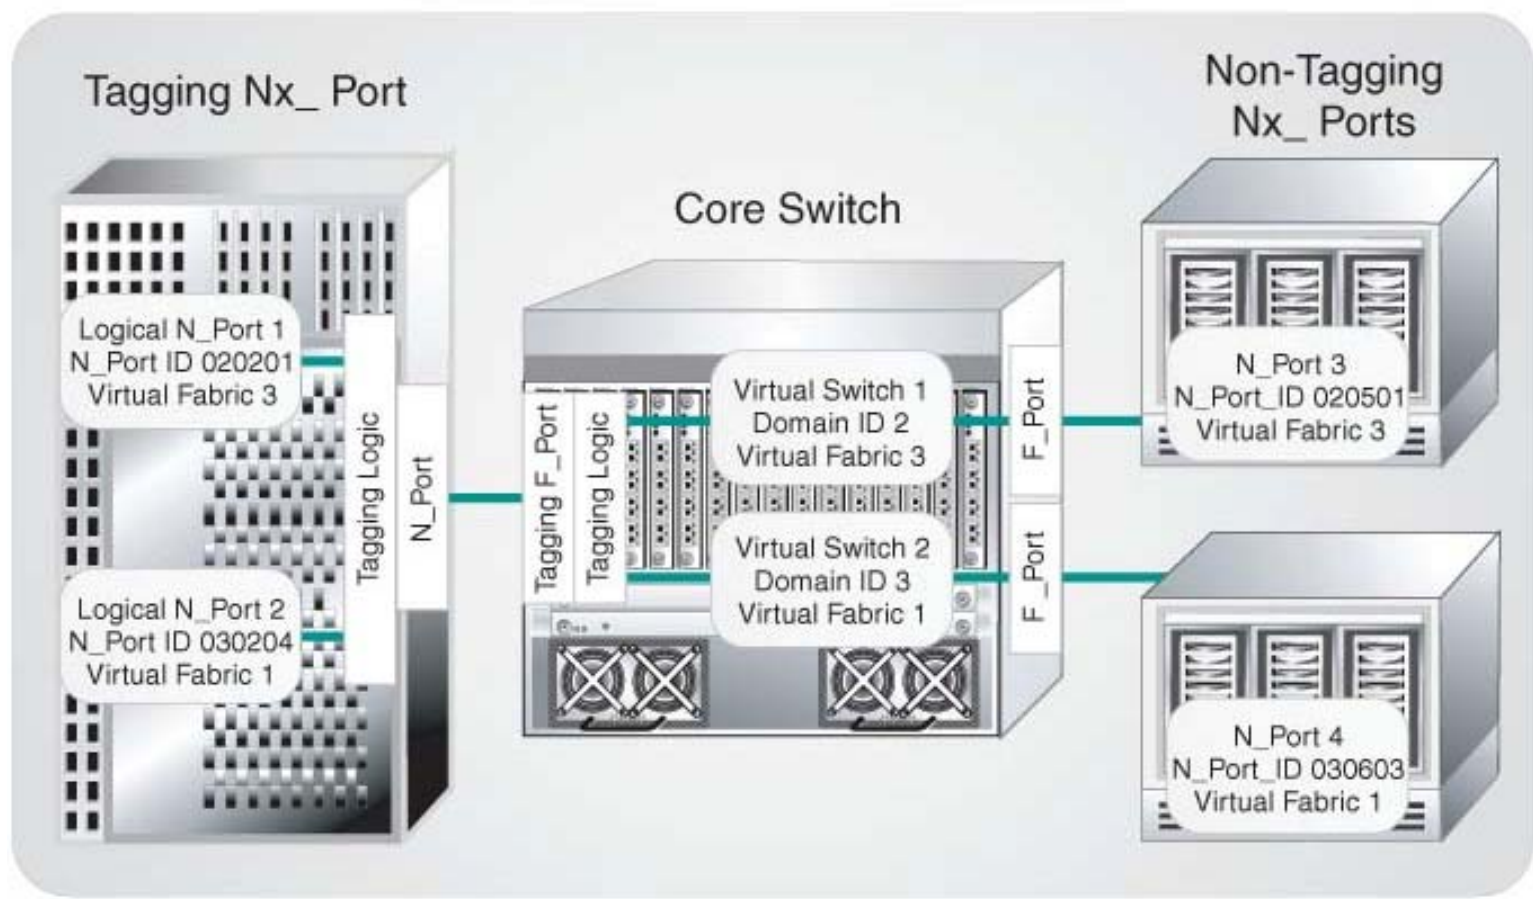

Inter-Fabric Routing

Fabrics and Inter-Fabrics

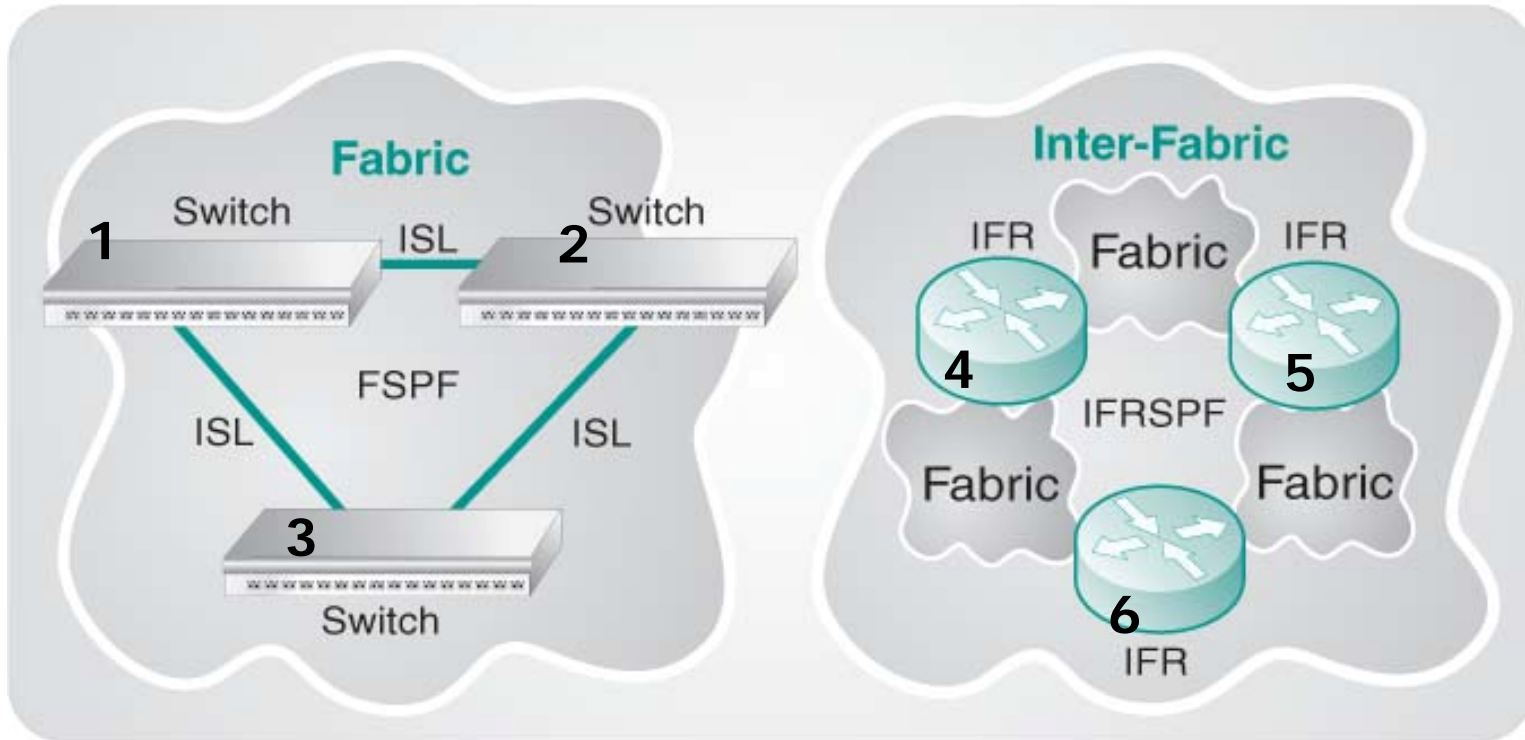


Layer 2 – Switching
FSPF = Fabric Shortest Path First
ISL = Inter-Switch Link


Layer 3 – Routing
IFRSPF – Inter-Fabric Routing
Shortest Path First
IFR = Inter-Fabric Router
Simple Routing



FC-SATA Configuration

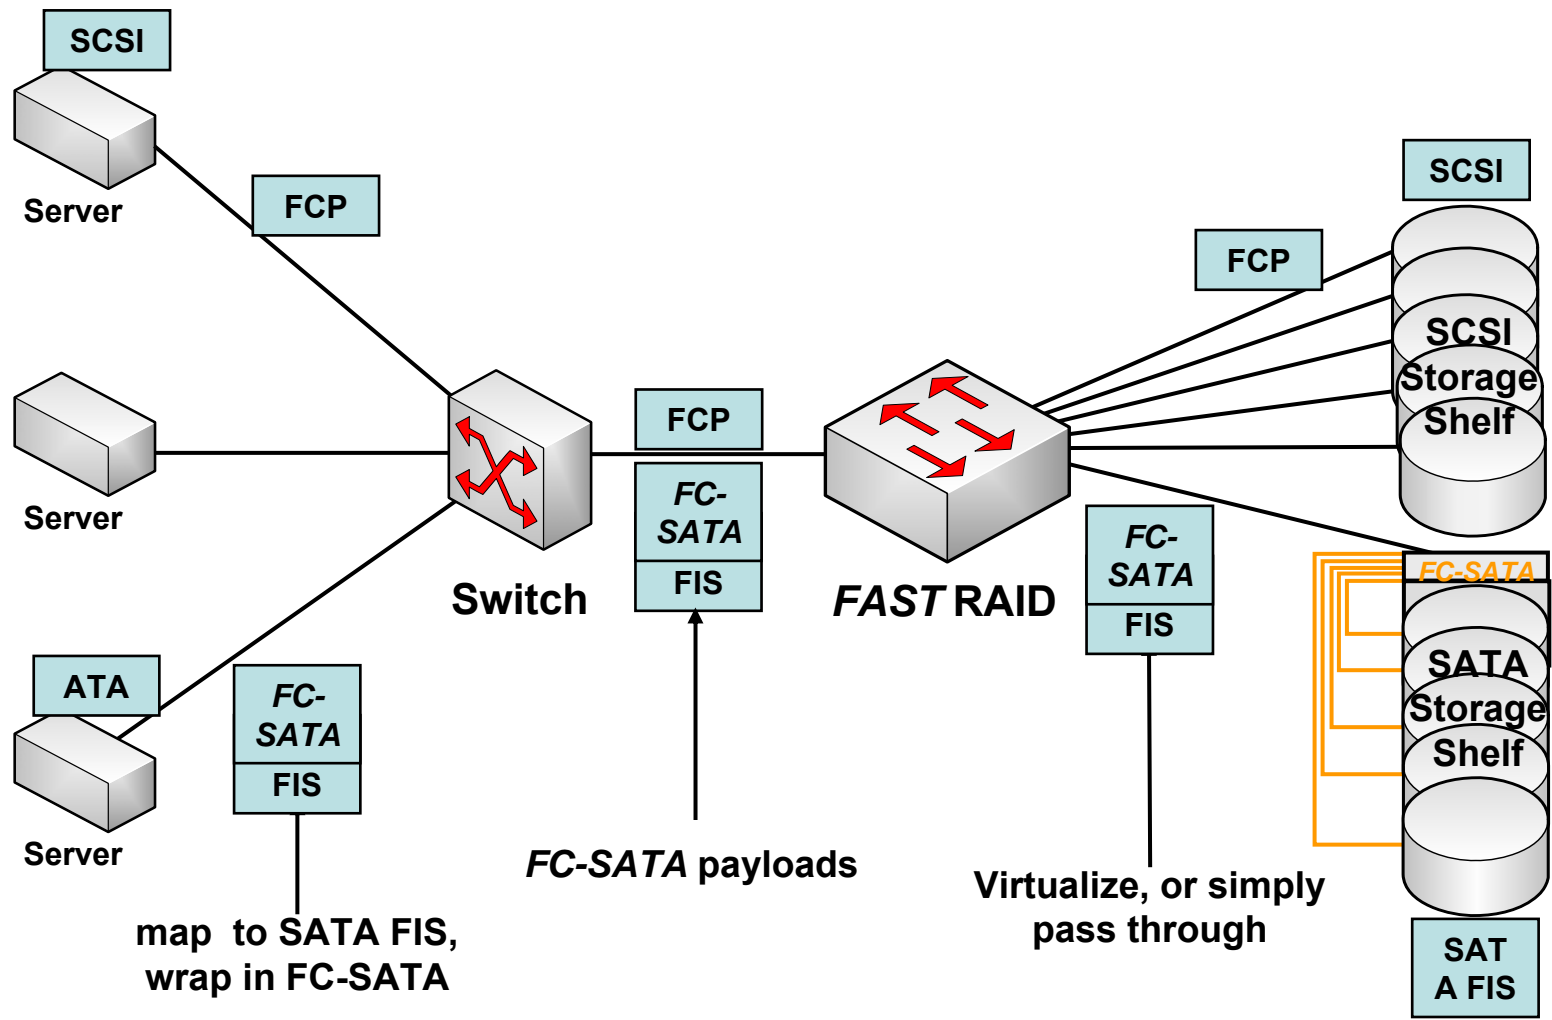

- FC-SP Has Completed Letter Ballot and Will Soon Be A Standard
- Addresses
 - Infrastructure (Passwords, PKI, Secrets)
 - Authentication (FCAP, DH-CHAP, FCPAP)
 - Authorization (Security Policies)
 - Data Integrity (Hash, Keyed-Hash, Signatures, ESP)
 - Confidentiality (ESP)
 - Policy Distribution

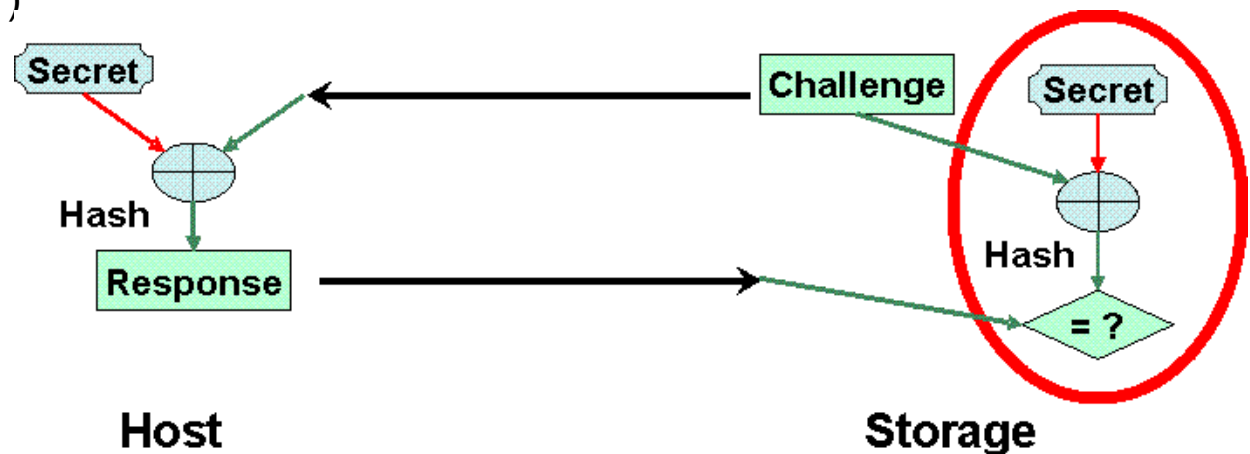

Refer to SNIA FC-SP Tutorial

Fibre Channel: The Storage of Business

Dominates the SAN market today

Fibre Channel has a clear roadmap to provide:

- Higher performance
- Additional capabilities (Security, Tiered Storage, Intelligence...)
- Enablers for new markets

Easy to learn, use and implement

Protects and future proofs storage investments

Comprehensive end to end solution

Fibre Channel Meets the Challenge



Q&A / Feedback

- Please send any questions or comments on this presentation to SNIA: tracknetworking@snia.org

**Many thanks to the following individuals
for their contributions to this tutorial.**

SNIA Education Committee

**Dr. M. K. Jibbe
Skip Jones
Steve Wilson
Tom Hammod-Doel
Howard Goldstein
Robert Peglar**

Continue Your SNIA Education Experience At SNW

- Attend Hands-On Labs in:
 - Data Classification
Key to Service Level Management
 - Data Security and Protection
Data Assurance Solutions to Meet Corporate Requirements
 - IP Storage
iSCSI, Your IP SAN
 - Storage Management
Manage Storage or Be Managed By It
 - Storage Virtualization
Increasing Productivity
 - Zero to SAN
 - *Fibre Channel Connectivity in No Time*



Sessions begin Monday afternoon, April 16 and continue through Wednesday, April 18.

All sessions in Emma/Maggie/Annie, 3rd Floor of the Hyatt Manchester.

Registration at the SNW Registration area